


Floor lamp LUCTRA® VITAWORK® UP 14 HCL EU

Article number	394401	Sales unit quantity	1 Set
Colour	Black	Sales unit EAN	4005546744254
Packaging unit	1 piece	Packing weight (gross)	16700 G
Base EAN	4005546744254	Country of origin	DE



Logos and awards

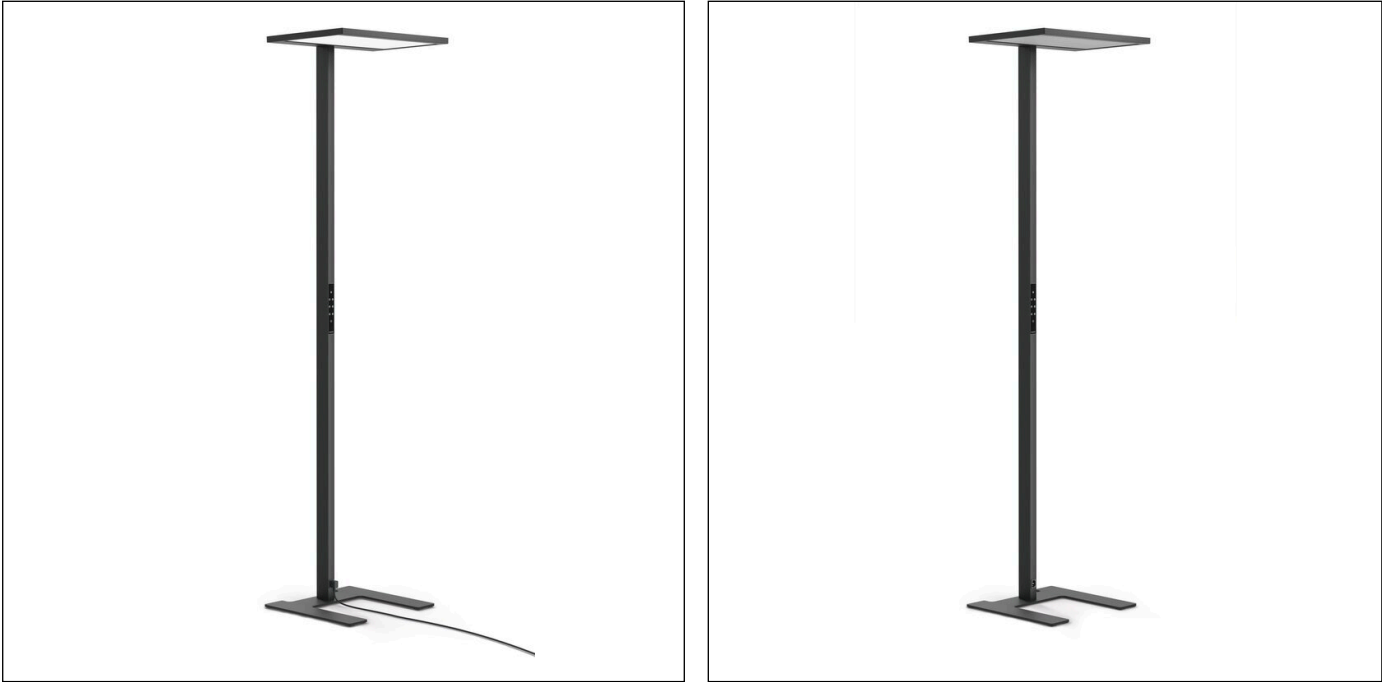

Product description

- LED daylight free-standing luminaire for more visual comfort, aesthetics and ergonomics in the office
- 14,000 lm for standard-compliant illumination of offices up to approx. 25 m² with optimised energy consumption
- Double asymmetric light distribution for uniform and deep room illumination
- Improved visual comfort - less eye strain for greater productivity and well-being
- Human Centric Lighting (HCL) - dynamic light adjustment for greater well-being and better support of the biorhythm
- Optimum lighting quality with infinitely adjustable colour temperature from 2,700 K to 6,500 K and Ra > 80 colour rendering
- Individually controllable - separate control of direct and indirect light
- Automatic sensor technology saves energy and reduces operating costs
- Flat U-shaped luminaire base - ideal for standard office desks
- IEC plug for flexible positioning and easy maintenance and replacement
- Made in Germany

Floor lamp LUCTRA® VITAWORK® UP 14 HCL EU

Product features

Outer width (mm)	540
Outer height (mm)	2035
Outer depth / length	430 mm
Brand	LUCTRA®
Number of lamp heads	1
Designer	Yellow design, Prof. Günter Horntrich
Luminaire head height 1 (mm)	21
Luminaire head 1 width (mm)	540
Cable length (mm)	3000
Depth Luminaire head 1 (mm)	370
Plug type	Type C
Non-slip	Yes
Clearance height (mm)	2029
Base / mount type	C-shaped base
Light direction	Direct / indirect
Light distribution indirect	Asymmetric
Rated luminous flux total	14000
Rated luminous flux direct	12500
Rated luminous flux indirect	1500
Colour temperature (CCT=correlated color temperature)	2700 K - 6500 K
Light colour	Warm white, neutral white, cold white
Human Centric Lighting / Biological Lighting Effect	Yes
Colour rendering index (CRI)	≥ 80
Colour tolerance	< 3 SDCM
Glare UGR	≤ 12
LED	Yes
Plug	Replaceable by manufacturer / specialist
Dimmable	Yes
Direct/indirect lighting separately dimmable	Yes
Setting Light intensity	Seamless

Floor lamp LUCTRA® VITAWORK® UP 14 HCL EU

Setting light colour	Seamless
Presence sensor	Infrared
Light intensity sensor	Yes
Touch panel material	Plastic
Touch panel Lighting	Yes
Type of operation	Touch panel
Standby consumption (W)	0.5
Luminous efficiency (lm/W)	> 137
Power consumption (W)	105
Protection class	1
Protection type	IP 20
Energy efficiency class direct	B
Energy efficiency class indirect	B
EPREL reg. no. direct	2164895
EPREL reg. no. indirect	2164898